

Elinx™ EIRP305-24V-T

5 Port Industrial Ethernet Switch with 4 PoE Ports

- ✓ Five 10/100 Base-T Ethernet Ports
- ✓ Four 802.3af End-point PoE Injector Ports
- ✓ Class 1 Div 2
- ✓ Wide Operating Temperature (-40 to 75C)
- ✓ 3000V EFT & 6000V ESD Protection
- ✓ Dual 24 or 48 VDC Power Inputs

The *EIRP305-24-T* is a five Port Unmanaged Industrial Ethernet Switch with four 802.3af (Alternative A) end-point Power Over-Ethernet ports. As power sourcing equipment (PSE), these ports can be used to power 802.3af compliant powered devices (PD). This eliminates the need for a separate power line to each end device.

High-Speed Transmissions: The EIRP305-24-T includes a switch controller that automatically senses transmission speed (10/100 Mbps). The RJ-45 interface also auto-detects MDI or MDI-X, eliminating the requirement for a crossover cable. Each port is buffered and supports store-and-forward protocol.

Dual Power Input: To reduce the risk of power failure, the EIRP305-24-T provides two 24 or 48 VDC power inputs. If the power fails, the switch will automatically use the secondary power input. Also, if the power goes out the corresponding P1 or P2 LED will go out and the Fault LED will light. The contacts for the alarm output will also open.


Flexible Mounting: The switch features a space saving IP30 metal enclosure that can be DIN or Panel mounted.

Transient Protection: The power line input on the EIRP305-24-T offers protection from up to 3,000 V EFT. The Ethernet ports offer up to 6,000 V ESD protection. These features make the switch reliable and suitable for use in harsh electrical environments.

Wide Operating Temperature: With an operating temperature of -40 to 75C (-40 to 167F), this switch is suitable for use in some of the harshest industrial environments that exist.

Easy Troubleshooting: There are two LED indicators for each port that display the link status and transmission speed. Three LED indicators for power (P1, P2 and Fault) show power status. FWD LED's for each PoE port indicate if the switch is providing power to the end-point device. These indicators allow you to quickly diagnose and correct problems and ensure your network remains reliable.

B&B Electronics' Elinx™ Brand Ethernet Switches are your number one choice for reliable performance in harsh industrial environments.

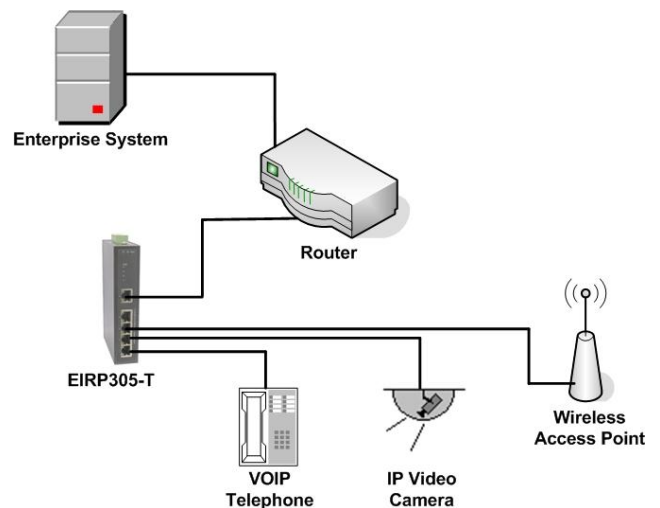

Ordering Information

| Model Number | Description |
|--------------|--|
| EIRP305-24-T | 5 Port Industrial Switch (4 PoE Ports) |
| Accessories | |
| MDR-100-24 | 24VDC, 96W, 4A Din Mount Power Supply |
| MDR-100-48 | 48VDC, 96W, 2A, DIN Mount Power Supply |
| DR19RMKT | Adjustable DIN Rail 19 Inch Rack Mount Kit |

Specifications

IEEE Standards

| | |
|--------------|---|
| IEEE 802.3 | 802.3. 10Base-T Ethernet |
| IEEE 802.3u | 100Base-TX and 100Base-FX Fast Ethernet |
| IEEE 802.3x | Flow Control and Back Pressure |
| IEEE 802.3af | Power Over Ethernet |

Network Specifications

| | |
|---------------|--|
| Architecture | Back-plane (Switching Fabric): 1.0 Gbps |
| Transfer Rate | 14,880 pps Ethernet Port 148,800 pps Fast Ethernet Port |
| Buffer | 448 Kbits |
| MAC Table | 2K |
| Misc | Broadcast Storm Filtering CSMA/CD |

Interface

| | |
|----------------|--|
| RJ-45 Ports | 5 x 10/100BaseT, Auto MDI/MDI-X |
| ESD Protection | 6000V ESD Protection |
| PoE | 802.3af End-point Alternative A (4 Ports) Positive (VCC+): Pins 1 and 2 Negative (VCC-): Pins 3 and 6 Data: Pins 1, 2, 3, and 6 |
| LED Indicators | P1 (Power 1), P2 (Power 2), Fault (Power Fault), RJ-45 Ports have 2 LED's to indicate LINK and activity. FWD LEDs for PoE status. |

Power

| | |
|------------------|--|
| Input Voltage | Dual 24 / 48 VDC Inputs Reverse Polarity Protection |
| Power Connection | Removable Terminal Block |
| Wire Size | 12 to 24 AWG |
| Power Use | 3.4 Watts (without PoE) 67 Watts (full load PoE) |
| Fault Output | 1 Relay Output – Normally Closed |
| EFT Protection | 3000 V EFT Protection |

Environmental

| | |
|--------------|-----------------------------|
| Op. Temp | - 40 to 75°C (-40 to 167°F) |
| Storage Temp | - 40 to 85°C (-40 to 185°F) |
| Op. Humidity | 0 to 95% |

Mechanical


| | |
|------------|---|
| Enclosure | IP30 Metal Enclosure |
| Mounting | 35mm DIN Rail or Panel Mount Attachments |
| Dimensions | 1.91 x 5.51 3.74 in (48.6 x 140 x 95 mm) |

Specifications

Regulatory

| | |
|-------------------------------|--|
| Safety/Hazardous Location EMC | UL/cUL Class I, Division 2, Groups A, B, C and D FCC Class A |
| | CE EN61000-6-2 CE EN61000-6-4 |
| | CE EN61000-4-2 (ESD) CE EN61000-4-3 (RS) |
| | CE EN61000-4-4 (EFT) CE EN61000-4-5 (Surge) |
| | CE EN61000-4-6 (CS) CE EN61000-4-8 (Magnetic Field) |
| Free Fall | IEC60068-2-32 |
| Shock | IEC60068-2-27 |
| Vibration | IEC60068-2-6 |

Dimensions

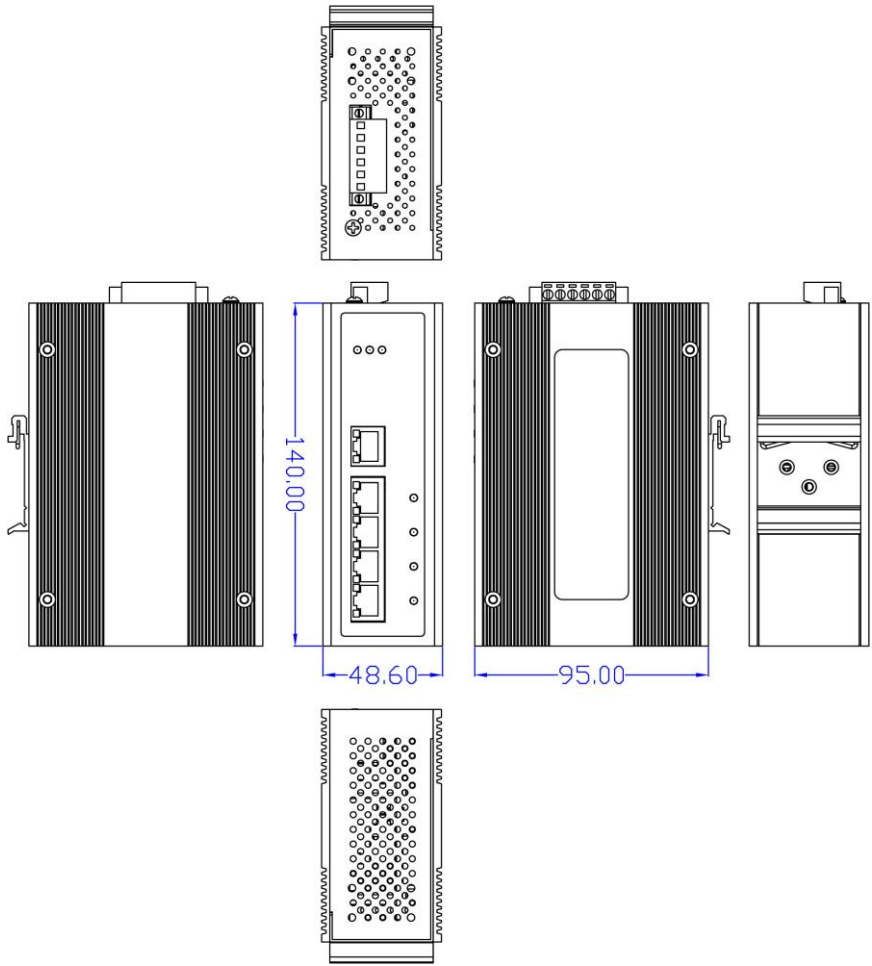

PRODUCT INFORMATION

B&B ELECTRONICS