




Celerway Phantom SD-WAN gateway

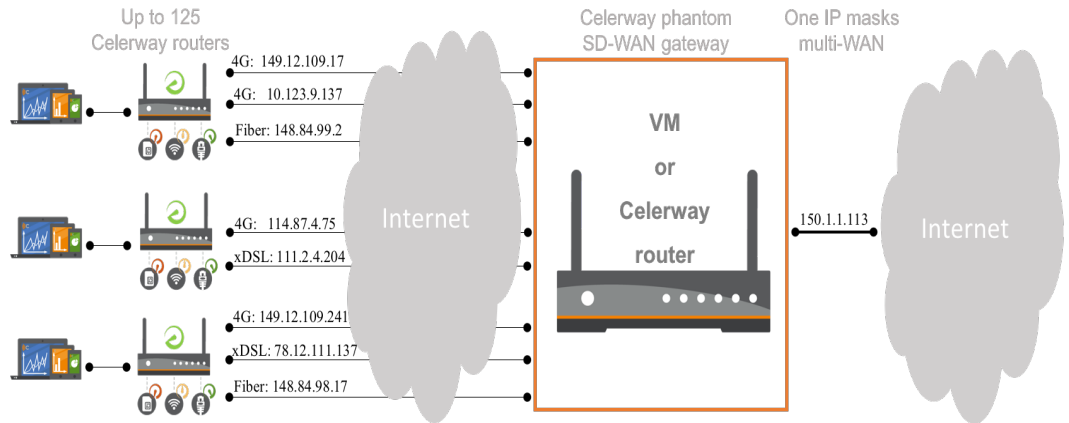

PHANTOM – SUPPORTED PLATFORMS

- Virtual machines
- Containers
- Linux servers
- Celerway routers

ROUTER HARDWARE FLEXIBILITY

- Type and number of WiFi radios
- Type and number of fiber/xDSL connections
- Type and number of 4G modems
- Number of ethernet and USB ports
- 100 Mbit/s – 1Gbit/s
- Battery
- GPS

SEAMLESS HYBRID WAN

In a multi-WAN/hybrid-WAN set-up, many applications have trouble reconnecting using a new IP address after being moved to another link.

Celerway Phantom SD-WAN ensures uptime, and the same IP address, no matter what happens to underlying networks.

LIGHTWEIGHT AND ADVANCED

- Chose which applications should be routed through the Phantom Gateway
- Lightweight tunnels with optional encryption allows wide range of security options
- Flexible bonding algorithms aggregates bandwidth from several networks

CLIENT SOFTWARE FOR ANY DEVICE

- One Phantom instance serves up to 125 routers
- Celerway Phantom software runs on a wide variety of platforms and devices - from mobile handheld routers to VMs or dedicated servers

EASY ADMINISTRATION, CUSTOMER SUPPORT AND TROUBLESHOOTING

- Managed from the same cloud-based system as all the routers
- Real time L1-L7 quality indicators
- Quality statistics
- Alarms based on selected quality indicators
- Customer interaction and sharing information
- Full remote configuration
- Easy troubleshooting
- End-to-end root cause analysis

